

Mono Perc



DHM-72L9

Half-Cell High Efficiency PV Module

Quality Guarantee

12-year Material & technology warranty

25-year Linear power output warranty

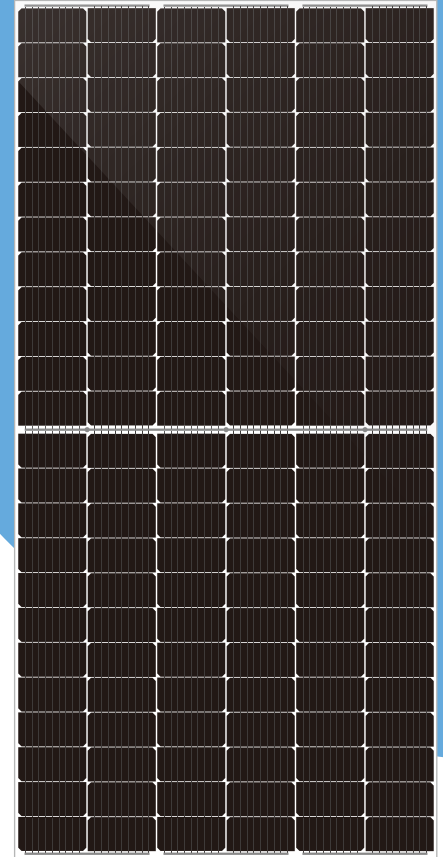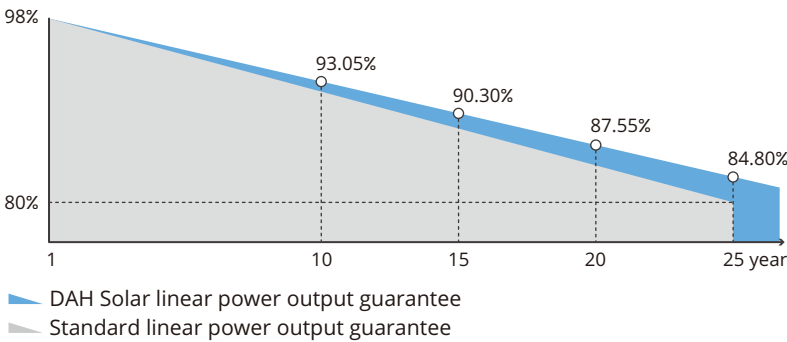

430~460W^{0 ~ +5W}

Max
Module
Efficiency

21.39%

Optimal Process Design
166mm+9BB+Half-cut, higher power output

Select Grade A Crystalline Silicon Solar Cells
Grade A crystalline silicon solar cells make high-power output with cost-effective

Stable Generation Performance
Guaranteed 0~+5W positive tolerance and slower power attenuation: first year ≤2%, 0.55% per year from 2-25

Process Upgraded
Lower risk of hot spot and stronger anti-PID ability

Higher Power Gains and Lower Losses
Excellent low irradiance performance and low shadow loss

Strong Environmental Adaptability and Great Durability
Certified by Dust-Sand, Salt-Mist, Ammonia etc. weather resistance tests and enhanced mechanical load: wind load (2400 Pascal) and snow load (5400 Pascal)

Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 / CE / FIDE / INMETRO
ISO 45001-


2018/International standards for occupational health & safety
ISO 14001-

2015/Standards for environmental management system
ISO 9001-

2015/Quality management system

DHM-72L9 430~460W

Design

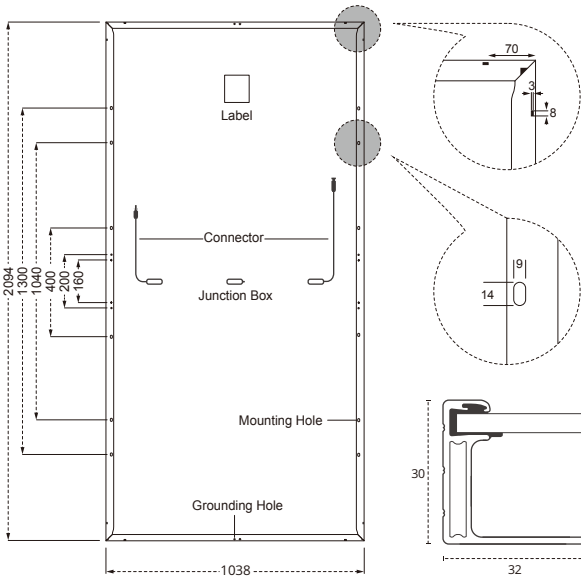

Mechanical Specification

Cells Type
Mono 166×83mm

Weight
23.5kg

Cable
(Including connector)
No. of Cells
Glass
Junction box
Connector

Dimension (L×W×T)
2094×1038×30mm

Packing
36pcs/pallet, 792pcs/40HQ

4.0mm², Portrait: 300mm(+)/400mm(-)
Landscape: 1400mm(+)/1400mm(-)
144 (6×24)
3.2mm High Transmission, Antireflection Coating
IP68, 3 Bypass Diodes
MC4 Compatible

Operating Parameters

Maximum system voltage 1500V DC
Operating Temperature -40 ~ +85°C
Maximum series fuse rating 20A
Snow load, frontside 5400Pa
Wind load, backside 2400Pa
Nominal operating cell temperature 45°C±2°C
Application level Class A

STC-Electrical Characteristics

Module Type	DHM-72L9							
Maximum Power (Pmax)	430	435	440	445	450	455	460	465
Open-circuit Voltage (Voc)	48.70	48.85	49.00	49.15	49.30	49.45	49.60	49.75
Maximum Power Voltage (Vmp)	41.51	41.66	41.81	41.96	42.11	42.26	42.41	42.56
Short-circuit Current (Isc)	11.23	11.26	11.29	11.32	11.35	11.38	11.41	11.44
Maximum Power Current (Imp)	10.36	10.44	10.52	10.61	10.69	10.77	10.85	10.93
Module Efficiency (%)	19.78	20.01	20.24	20.47	20.70	20.93	21.16	21.39
Temperature Coefficient of Isc	0.05%/°C							
Temperature Coefficient of Voc	-0.31%/°C							
Temperature Coefficient of Pmax	-0.35%/°C							

Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT-Electrical Characteristics

Maximum Power (Pmax)	320	324	327	331	335	339	342	346
Open-circuit Voltage (Voc)	45.7	45.8	46.0	46.1	46.2	46.4	46.5	46.7
Maximum Power Voltage (Vmp)	38.9	39.1	39.2	39.4	39.5	39.6	39.8	39.9
Short-circuit Current (Isc)	9.07	9.10	9.12	9.15	9.17	9.20	9.22	9.24
Maximum Power Current (Imp)	8.22	8.28	8.35	8.41	8.48	8.54	8.60	8.67

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

I-V Curve (DHM-72L9-465W)

